


Repair & Replacement Instructions ■

Cascha™ Furniture

Lounge, Guest, & Stool Base & Shell Removal & Replacement

August 2025

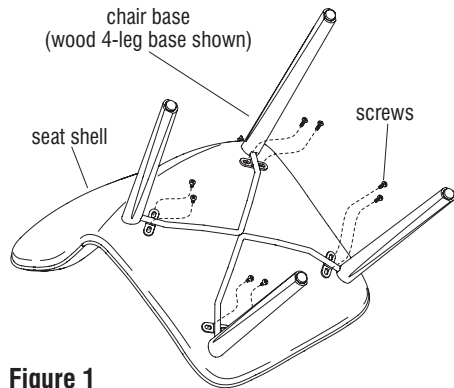

Lounge, Guest, & Stool Base & Shell Removal & Replacement - Overview




Note: Although the figures throughout this instruction illustrate a guest chair with a wood 4-leg base being removed and replaced, the instructions apply to all Cascha lounge, guest, & stools and the original base style they were ordered with. Your configuration may vary.

Base Removal

1. Tip the chair or stool down onto a soft, protective surface on its front side to access the screws securing the chair base to the seat shell (Figure 1).
2. Remove the screws securing the chair base to the underside of the seat shell, then remove the chair base from the seat shell. If the shell is being replaced, save the screws to be reused in a later step (Figures 1 & 2).
3. If the seat shell is being replaced on the chair or stool, proceed to "Locating Chair Base Mounting Holes on Replacement Seat Shell" instructions on this page. If the base is being replaced, proceed to "Chair Base Installation" instructions on the next page.

Locating Chair Base Mounting Holes on Replacement Seat Shell

1. Use the old seat shell as a guide to help locate the chair base mounting hole locations and transfer them over to the new seat shell. On the underside of the replacement seat shell, feel around and locate the chair base mounting holes under the upholstery (Figure 3).

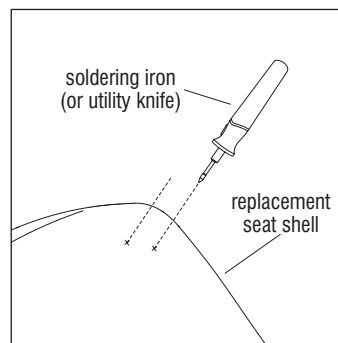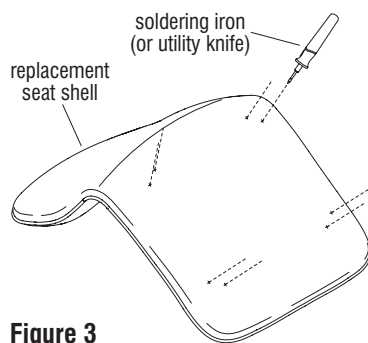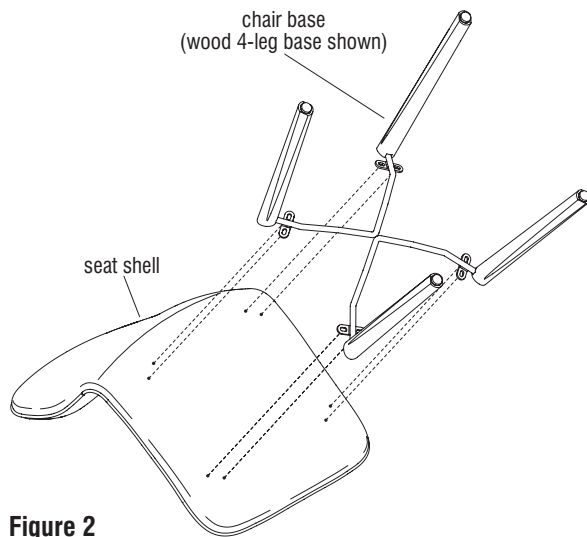

Important: In the step below, new mounting holes must be made with care to avoid pulling of fabric fibers and damaging the upholstery. Use of a soldering iron is recommended to burn open the required mounting holes. If a soldering iron is not available, a sharp utility knife may be used carefully to expose the mounting holes under the upholstery.

2. At the covered mounting hole locations, use a soldering iron to burn through the upholstery, only into the mounting holes behind the upholstery. If a soldering iron is not available, using a utility knife, cut a small "X" through the upholstery on top of each hole location, cutting through the upholstery and foam (Figure 3 & Detail A).



Assemble units as described herein only. To do otherwise may result in instability. All screws, nuts and bolts must be tightened securely and must be checked periodically after assembly. Failure to assemble properly, or to secure parts may result in assembly failure and personal injury.



Assemble units as described herein only. To do otherwise may result in instability. All screws, nuts and bolts must be tightened securely and must be checked periodically after assembly. Failure to assemble properly, or to secure parts may result in assembly failure and personal injury.

Chair Base Installation

1. Align the mounting holes of the replacement chair base with the mounting holes on the underside of the seat shell. Secure together using the screws removed from the previous chair base (Figures 4 & 5).
2. Carefully turn the chair or stool back to the upright position.

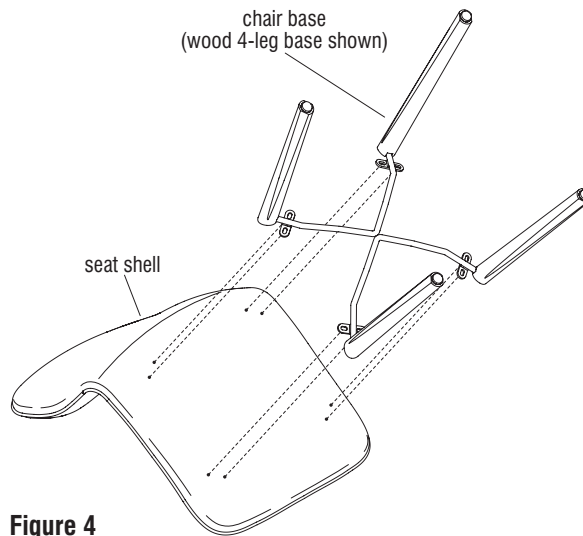


Figure 4

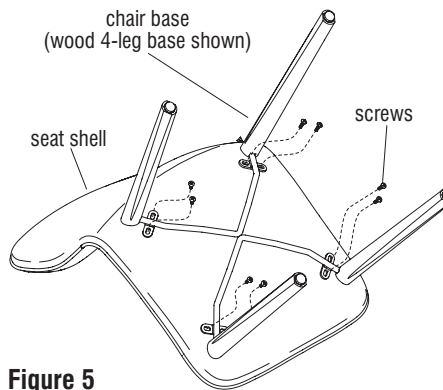


Figure 5